

DISPOSABLE THERMOCOUPLE ASSEMBLIES


Disposable type thermocouples are manufactured with Autobond™ wire construction. Autobond construction was designed to eliminate the “leakage path through wire” often found in autoclave applications when traditional wire constructions are employed.

Color-coded, insulated singles are bonded together in a proprietary process, eliminating the need for a conventional jacket.

The exceptional characteristics of Teflon®, with a low coefficient of friction, and excellent resistance to moisture and chemicals further enhance the Autobond construction.

FEATURES

- Kink and Knot Resistant
- Calibrated/Traceable Conductors
- Test Reports
- 100% Inspection.
- Low Cost
- Available in J, K & T ANSI Types.
- 400°F (204°C) FEP & 500°F (260°C) PFA Insulations
- Molded Connectors Eliminate Errors Associated with Connector Shorts and Reverse Readings

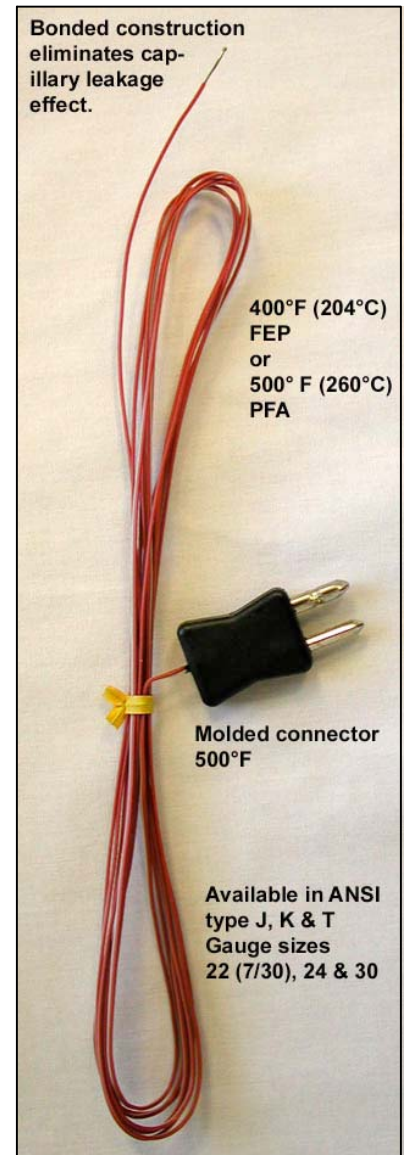

Note: All statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed. No warranties of any kind are made except that materials supplied are TMI standard quality. All risk and liability arising from handling, storage and use of TMI products, as well as compliance with applicable legal restriction, rest with the buyer.